

DryMAX XL CRO | XL LGR DEHUMIDIFIER



6/25 Rev. A

USEPHOENIX.COM


800-533-7533

ADDITIONAL FEATURES, TECHNICAL SPECS AND ACCESSORIES

ADDITIONAL FEATURES

- Onboard USB to power DryPHONE for remote monitoring
- Built in Bluetooth data logging of temperature relative humidity inlet and outlet
- Add two AA batteries for builtin connection to DryLINK Asset Manager (no tag needed)
- DryLINK enabled

Nesting for space savings

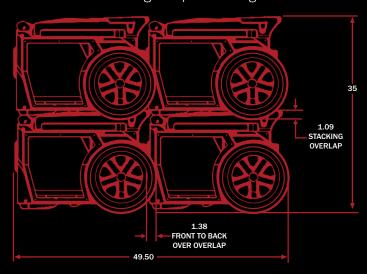

TECHNICAL SPECS

Part Number: 4045100-01 (Red)

Part Number: 4045100-02 (Blue)

Capacity: 135 Pints/Day @ 80F/60%RH

Current: 6.7 Amps

Airflow: 300 CFM

Cord Length: 25 ft.

Hose Length: 33 ft.

Operating Range: 33°F - 105°F

Size: 20"W x 18"H x 25.4"D, 85 lbs.

Xactimate Category: XL

Xactimate Code: WTRDHM>>

Rate/Day: \$114.72*

Warranty: 100% parts and labor for first year,

100% sealed refrigeration system for 2 - 5

years.

Xactimate Rates are for Madison, WI as of 12/12/23 and may differ by region.*

FILTERS

MERV-10 Filter

Air filter, pleated, 55% efficiency up to 1.0 microns, 12" x 14" x 1"

ORDERING INFORMATION

ORDERING INFORMATION

14" Round Lay-Flat Duct, 250'

55% MERV-10 Filter Part Number: 4038558

Part Number: 4024936

Duct rings are included with unit.

Lay-Flat sold separately.

DUCTING

▶ 14" Round Lay-Flat

4 mil poly tubing duct, 14" x 250' roll



Scan this QR code to visit the DryMAX XL Pro webpage.



Drymax XL Pro webpage



Patents: thermastor.com/patents